MGR 00F ADPBS ...


Wall Mount Receptacle for Front Mounting with Adapter to terminate Shielded Braid with Band - Strap or Constant Force Spring, with heat shrink boot (with S.S. wear pin)

MG 00F ADPBS ...

Wall Mount Receptacle for Front Mounting with Adapter to terminate Shielded Braid with Band - Strap or Constant Force Spring, with heat shrink boot.



MGR / MG 00F ADPBS ... B05 * - Rear Mounting - Dimn. 'J' & Clear Hole MGR / MG 00F ADPBS ... B051 * - Rear Mounting - Dimn. 'J' & 'K' (Thrd. hole)

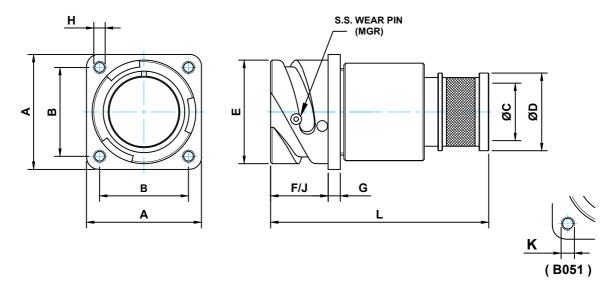

SHELL SIZE	A ±0.3	B ±0.13	ØC MIN.	ØD REF.	ØE +0.00 -0.15	F +0.4 -0.0	J +0.4 -0.0 (B05)	G ±0.2	K ISO THREAD (B051)	+0.15 -0.00	L MAX.
10SL	25.4	18.2	8.10	14.50	18.2			2.8			
128	28.0	20.6	8.10	14.50	21.4	14.2	18.2	3.2			65.00
148	30.0	23.0	11.10	17.50	24.6						
168	22.0	24.6	13.00	19.40	27.4			5.2		3.2	
16	32.0	24.6	13.00	19.40	27.4	19.0			M4		84.00
18	35.0	27.0	15.90	22.30	30.8		23.0	4.0			
20	38.0	29.4	20.60	27.10	34.2						
22	41.0	31.8	21.00	27.40	37.4						
24	44.5	34.9	25.40	31.80	40.9	- 20.6				3.7	
28	50.8	39.7	28.60	35.00	46.7						
32	57.0	44.5	33.50	40.00	53.4	- 22.2	24.0		М5	4.3	
36	64.0	49.2	39.00	45.00	59.6						

Tel: +91 22 61953636; 61953608, Fax: +91 22 61953699